

COUNTERTOP DOUBLE HOB COOKTOP

Side-to-Side with Helios Controls



HELIOS

Helios, CookTek's new enhanced user interface, provides improved reliability and more precise cooking controls. The capacitive touch control includes power percentage or temperature display options.

FEATURES

- Models available in 5,000 (2,500/hob) and 7,000 (3,500/hob) watts
- Available in Europe Perilex 2 x 230VAC 2xP +2xN
- Portable design with stainless steel housing
- Easy-to-clean high-temperature glass-ceramic top
- High-quality internal electronics and heavy gauge Litz wire
- 4.3" capacitive touch display
- Even heat distribution across bottom of cookware*
- Temperature range from 85°F–425°F (29°C–218°C)
- Individual controls for each hob for independent operation and functionality
- Automatic pan detection allows for instant energy transmission to pan
- Automatic shut-off feature prohibits overheating
- Integral grease filter and air baffle ensure air intake is cleaner and cooler
- Sloped front panel allows for easy viewing and operation
- Microprocessor monitors vital components to check for overheating, power supply issues, and more

INCLUDED



- Integral fan to keep internal components cool
- Standard Cat 5e or Cat 6 patch cable from unit to control box
- Plug and cord (6 ft. nominal)

CERTIFICATIONS



*Induction cooking requires the use of induction-compatible (i.e. magnetic) cookware.

It is the owner and installer's responsibility to comply with all local codes. CookTek reserves the right to make substitutions of components or change specifications without prior notice.

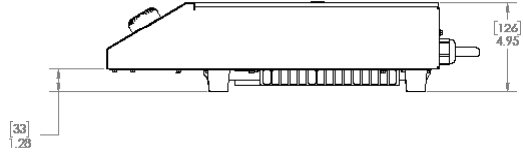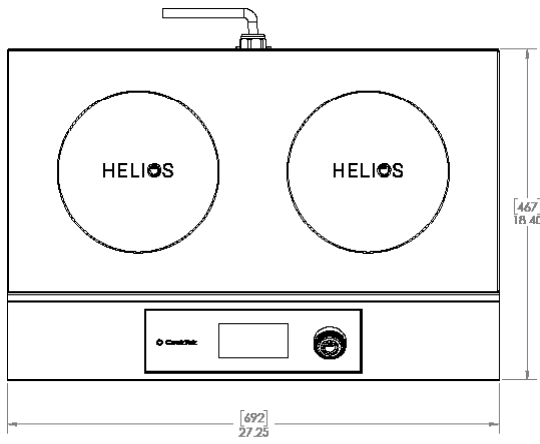

DIMENSIONS		
Height	4.95"	126 mm
Width	27.25"	692 mm
Depth	18.40"	467 mm
Feet Height	1.28"	33 mm
Weight	31 lb.	14.0 kg
Max Ambient Temperature	122°F	50°C
WALL CLEARANCE		
Front	2"	51 mm
Sides	2"	51 mm
Rear	2"	51 mm
SHIPPING INFORMATION		
Packaged Height	11"	279 mm
Packaged Width	32"	813 mm
Packaged Depth	23"	584 mm
Packaged Weight	45 lb.	20.4 kg
Item Class	250 NMFC #26710	

ELECTRICAL SPECIFICATIONS			
UNITED STATES/CANADA			
HTF-9500-SS25-1	Freestanding, 2 hob, side-to-side, 2 x 2500W, 240V	NEMA 6-30P	
HTF-9500-SS35-1	Freestanding, 2 hob, side-to-side, 2 x 3500W, 240V	NEMA 6-50P	
UK AND SAUDI ARABIA			
HTF-9500-SS25-2	Freestanding, 2 hob, side-to-side, 2 x 2500W, 240V	IEC 309 32A, 3-pin	
HTF-9500-SS35-2	Freestanding, 2 hob, side-to-side, 2 x 3500W, 240V		
NETHERLANDS			
HTF-9500-SS25-3	Freestanding, 2 hob, side-to-side, 2 x 2500W, 240V	Perilex Din 49446 2P + 2N 16A	
HTF-9500-SS35-3	Freestanding, 2 hob, side-to-side, 2 x 3500W, 240V		
BELGIUM			
HTF-9500-SS25-3	Freestanding, 2 hob, side-to-side, 2 x 2500W, 240V	CEE 13520 5 Pin 3P + N 400V 32A	
HTF-9500-SS35-3	Freestanding, 2 hob, side-to-side, 2 x 3500W, 240V		
JAPAN			
HTF-9500-SS25-6	Freestanding, 2 hob, side-to-side, 2 x 2500W, 200V	N/A	
HTF-9500-SS35-6	Freestanding, 2 hob, side-to-side, 2 x 3500W, 200V	N/A	
SOUTH AFRICA			
HTF-9500-SS25-7	Freestanding, 2 hob, side-to-side, 2 x 2500W, 240V	N/A	
HTF-9500-SS35-7	Freestanding, 2 hob, side-to-side, 2 x 3500W, 240V	IEC 309 32A, 3-pin	
ISRAEL			
HTF-9500-SS25-8	Freestanding, 2 hob, side-to-side, 2 x 2500W, 240V	IEC 309 32A, 3-pin	
HTF-9500-SS35-8	Freestanding, 2 hob, side-to-side, 2 x 3500W, 240V		



NEMA 6-30P




IEC 309, 32A, 3-pin



NEMA 6-50P



56PA332, 32A, 250V



Perilex Din 49446 2P + 2N 16A

Kookgroep



CEE 13520 5 Pin 3P + N 400V 32A

Dedicated circuit required for each installation.