

## DROP-IN DOUBLE HOB COOKTOP

Side-to-Side with Helios Controls



### HELIOS

Helios, CookTek's new enhanced user interface, provides improved reliability and more precise cooking controls. The capacitive touch control includes power percentage or temperature display options.

#### FEATURES

- Models available in 5,000 (2,500/hob) and 7,000 (3,500/hob) watts
- Available in Europe Perilex 2 x 230VAC 2xP + 2xN
- Drop-in design with stainless steel
- High-quality internal electronics and heavy gauge Litz wire
- Easy-to-clean high-temperature glass-ceramic top
- 4.3" capacitive touch display
- Even heat distribution across the bottom of cookware\*
- Temperature range from 85°F–425°F (29°C–218°C)
- Individual controls for each hob for independent operation and functionality
- Automatic pan detection allows for instant energy transmission to pan
- Automatic shut-off feature prohibits overheating
- Integral grease filter and air baffle ensure air intake is cleaner and cooler
- Microprocessor monitors vital components to check for overheating, power supply issues, and more

#### INCLUDED


- Integral fan to keep internal components cool
- Standard Cat 5e or Cat 6 patch cable from the unit to the control box
- Plug and cord (6 ft. nominal)

#### CERTIFICATIONS




\*Induction cooking requires the use of induction-compatible (i.e. magnetic) cookware.

The owner and installer are responsible for complying with all local codes. CookTek reserves the right to make substitutions of components or change specifications without prior notice.

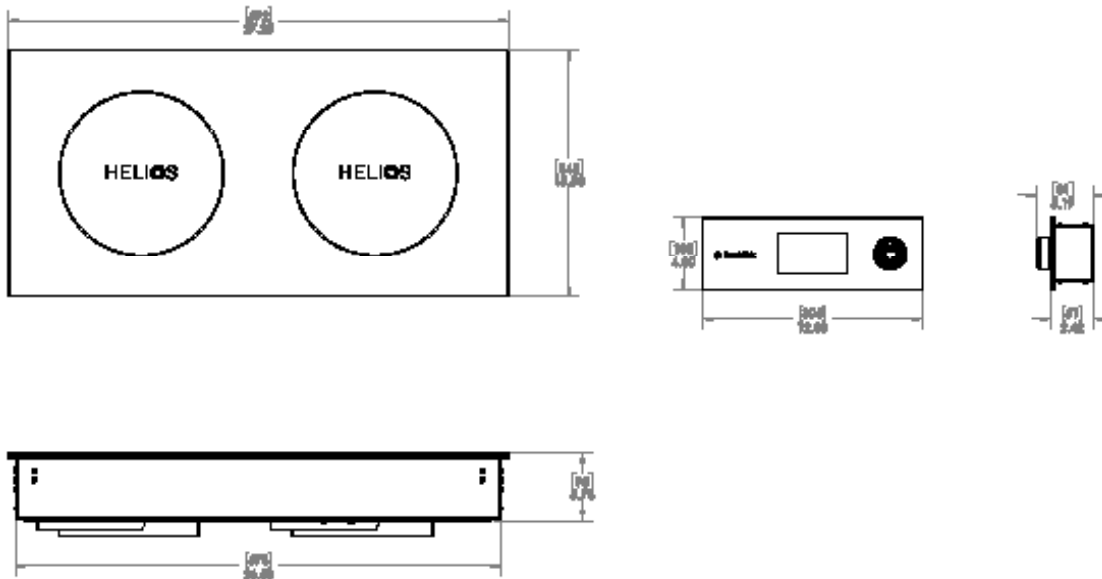

DIMENSIONS		
Height	3.73"	95 mm
Width	27.25"	692 mm
Housing Width	26.5"	673 mm
Depth	13.5"	343 mm
Housing Depth	12.75"	324 mm
Cutout Width	26.875"	683 mm
Cutout Depth	13.125"	333 mm
Weight	30 lb.	13.6 kg
CLEARANCE		
Front	2"	51 mm
Sides	2"	51 mm
Rear	2"	51 mm
Below	6"	152 mm
COOLING REQUIREMENTS AND SPECIFICATIONS*		
Max Ambient Temperature	122°F	50°C
Min. Ventilation Requirements	32 in <sup>2</sup>	206 cm <sup>2</sup>
Internal Cooling Fan Displacement	140 CFM (4.0m <sup>3</sup> /min)	
SHIPPING INFORMATION		
Packaged Height	11"	279 mm
Packaged Width	32"	813 mm
Packaged Depth	23"	584 mm
Packaged Weight	40 lb.	18.14 kg
Item Class	250 NMFC #26710	

ELECTRICAL SPECIFICATIONS (SINGLE PHASE)			
UNITED STATES/CANADA			
HTD-9500-SS25-1	Drop-in, 2 hob, side-to-side, 2 x 2500W, 240V	NEMA 6-30P	
HTD-9500-SS35-1	Drop-in, 2 hob, side-to-side, 2 x 3500W, 240V	NEMA 6-50P	
UK AND SAUDI ARABIA			
HTD-9500-SS25-2	Drop-in, 2 hob, side-to-side, 2 x 2500W, 240V	IEC 309 32A, 3-pin	
HTD-9500-SS35-2	Drop-in, 2 hob, side-to-side, 2 x 3500W, 240V		
NETHERLANDS			
HTD-9500-SS25-3	Drop-in, 2 hob, side-to-side, 2 x 2500W, 240V	Perilex Din 49446 2P + 2N 16A	
HTD-9500-SS35-3	Drop-in, 2 hob, side-to-side, 2 x 3500W, 240V		
BELGIUM			
HTD-9500-SS25-3	Drop-in, 2 hob, side-to-side, 2 x 2500W, 240V	CEE 13520 5 Pin 3P + N 400V 32A	
HTD-9500-SS35-3	Drop-in, 2 hob, side-to-side, 2 x 3500W, 240V		
JAPAN			
HTD-9500-SS25-6	Drop-in, 2 hob, side-to-side, 2 x 2500W, 200V	Call Factory	
HTD-9500-SS35-6	Drop-in, 2 hob, side-to-side, 2 x 3500W, 200V		
SOUTH AFRICA			
HTD-9500-SS25-7	Drop-in, 2 hob, side-to-side, 2 x 2500W, 240V	N/A	
HTD-9500-SS35-7	Drop-in, 2 hob, side-to-side, 2 x 3500W, 240V	IEC 309 32A, 3-pin	
ISRAEL			
HTD-9500-SS25-8	Drop-in, 2 hob, side-to-side, 2 x 2500W, 240V	IEC 309 32A, 3-pin	
HTD-9500-SS35-8	Drop-in, 2 hob, side-to-side, 2 x 3500W, 240V		

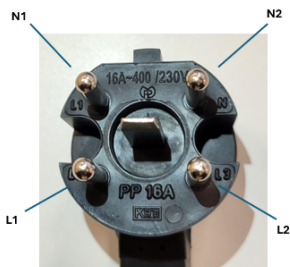

Perilex Din 49446 2P + 2N 16A  
Kookgroep



CEE 13520 5 Pin 3P + N 400V 32A

\* Adequate cabinet ventilation should be provided for all drop-in models to prevent overheating of unit.

Dedicated circuit required for each installation