

PLEXOR M2



FEATURES & BENEFITS

- Two (2) cooking technologies in one (1) appliance: rapid cook or impingement
- Modular design
- Operated by one (1) 50A or two (2) 30A plugs
- Simple and intuitive one-touch controls with icons
- Ventless – integral recirculating catalytic converters for UL® (KNLZ) listed ventless operation
- Adaptive power management ensures consistent results while power sharing
- Unlimited recipe storage
- Open Kitchen™ ready
- Includes single or double plug and cord (6 ft. nominal)



Connectivity Part Numbers

- MDD-1001: Initial equipment, two way connectivity bundle
- MDD-1002: Additional equipment, two way connectivity bundle
- MDD-1005: Additional year of subscription (PhD SAAS)



* View standard accessories on page 3



SPECIFICATIONS	PHASE	VOLTAGE	CURRENT	MAX CIRCUIT	PLUG	
	1 Phase	208/240V	30A	30A	NEMA 6-30P	
	1 Phase	208/240V	50A	50A	NEMA 6-50P	

This product conforms to the ventilation recommendations set forth by NFPA96 using EPA202 test method.

* Smart Voltage Sensor Technology does not compensate for lack of or over voltage situations. It is the responsibility of the owner to supply voltage to the unit according to the specifications on the back of this sheet.

† Ventless certification is for all food items except for foods classified as "fatty raw proteins." Such foods include bone-in, skin-on chicken, raw hamburger meat, raw bacon, raw sausage, steaks, etc. If cooking these types of foods, consult local HVAC codes and authorities to ensure compliance with ventilation requirements.

If you have questions regarding ventless certifications or local codes, please email ventless.help@turbochef.com TurboChef reserves the right to make substitutions of components or change specifications without prior notice.

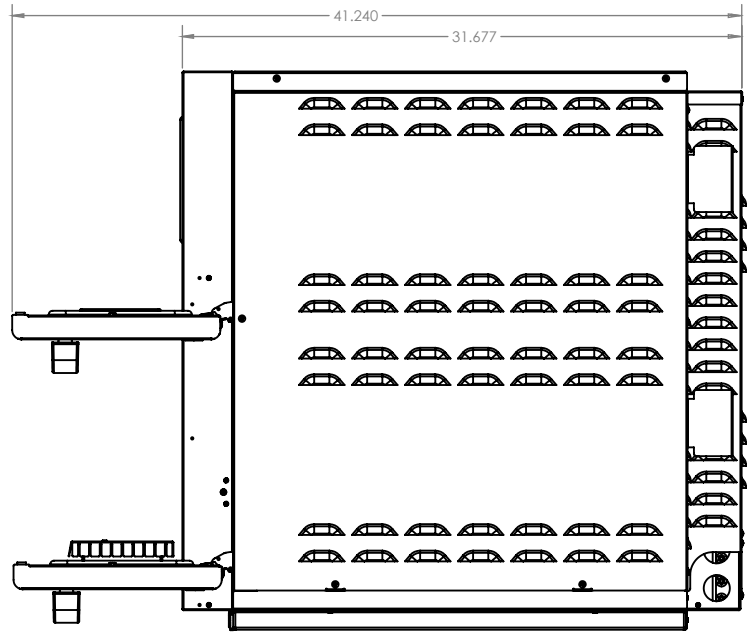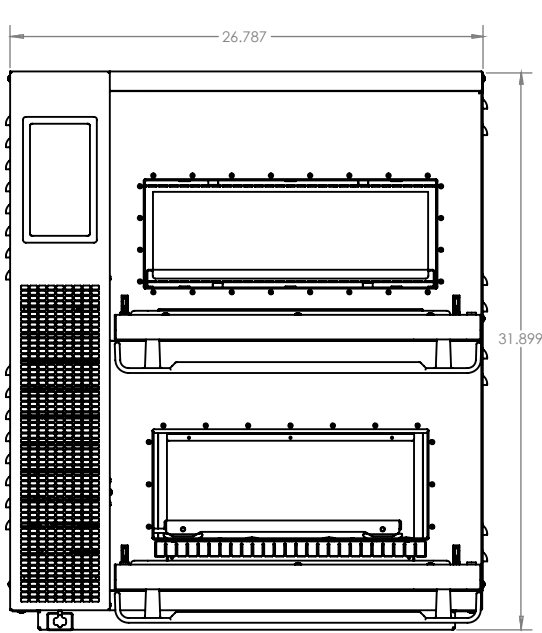

DIMENSIONS

Height	31.89"	810 mm
Width	26.79"	680 mm
Depth	31.67"	804 mm

RAPID COOK – COOK CHAMBER

Height	6.14"	156 mm
Width	15.5"	394 mm
Depth	15.42"	392 mm

IMPINGEMENT – COOK CHAMBER


Height	5.07"	129 mm
Width	16.5"	419 mm
Depth	17.16"	436 mm
Volume	0.83 cu.ft.	23.5 liters

WALL CLEARANCE


Top	5"	0 mm
Sides	2"	0 mm

SHIPPING

Oven Only	175 lb
Shipping Weight	380 lb
F.O.B.	Carrollton, TX

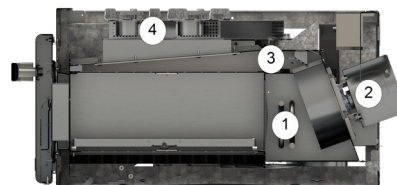

- Rapid Cook Module
1. Heating Elements
 2. Blower Motor
 3. Catalytic Converter
 4. Top-launched Microwave

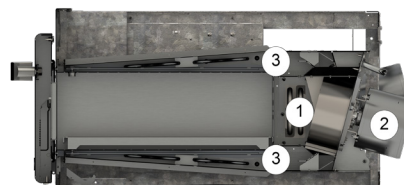

- Impingement Module
1. Heating Elements
 2. Blower Motor
 3. Catalytic Converters

STANDARD ACCESSORIES

PART NUMBER	RAPID COOK RAPID COOK	RAPID COOK IMPINGEMENT	IMPINGEMENT IMPINGEMENT
105596	1		2
105597	1		2
105598	2	4	
105701	1	1	1
NGC -1478	1	1	1

SEE TABLE BELOW FOR PART NUMBER DESCRIPTIONS

PART NUMBER	DESCRIPTION
105596	BASKET, 15.5 X 15.5 X.5, TEFLON (O-WPB-1009, SOLID)
105597	BASKET, 15.5 X 15.5 X.5, TEFLON (O-CPB-1009, PERF)
105598	BASKET, 12.65 X 13.25 X .375, TEFLON (O-WPB-1008, SOLID)
105701	OVEN CLEANER, GUARD KIT
NGC -1478	PADDLE, ALUMINUM

STANDARD CONFIGURATION



PART NUMBER	DESCRIPTION
PLM-9900-1-II	OVEN, PLEXOR, M2, 208/240V, 1PH, 50A, IMP/IMP
PLM-9900-1-IR	OVEN, PLEXOR, M2, 208/240V, 1PH, 50A, IMP/RC
PLM-9900-1-RI	OVEN, PLEXOR, M2, 208/240V, 1PH, 50A, RC/IMP
PLM-9900-1-RR	OVEN, PLEXOR, M2, 208/240V, 1PH, 50A, RC/RC
PLM-9900-2-II	OVEN, PLEXOR, M2, 208/240V, 1PH, DUAL CORD, 2X 30A, IMP/IMP
PLM-9900-2-IR	OVEN, PLEXOR, M2, 208/240V, 1PH, DUAL CORD, 2X 30A, IMP/RC
PLM-9900-2-RI	OVEN, PLEXOR, M2, 208/240V, 1PH, DUAL CORD, 2X 30A, RC/IMP
PLM-9900-2-RR	OVEN, PLEXOR, M2, 208/240V, 1PH, DUAL CORD, 2X 30A, RC/RC