

Project Name: _____
 Location: _____
 Item: _____ Quantity: _____
 Date: _____

Model:
PSB7

Reach-In:
1 full door freezer (Propane)

Standard Features:



- **SILVER LINE**
Is designed with enduring quality that will improve the efficiency and production of your restaurant.
- **FRONTPANEL**
Embossed frontpanel hinged to facilitate the routine maintenance
- **INTERIOR and EXTERIOR**
Durable, stainless steel AISI 441
- **REFRIGERANT GAS**
Environmentally friendly R290 (Propane).
- **REFRIGERATION**
Monobloc refrigeration system
- **LEGS**
Adjustable plastic legs
- **POWER CORD**
Cord and plug included
- **SHELVING**
Nr. 3 epoxy coated wire shelf standard, installed per full door section.
- **TEMPERATURE CONTROLLER**
Electronic digital controller .
- **INSULATION**
Ciclopentane High density foamed in place environmentally friendly.
Kyoto Protocol Compliant:
ODP = 0 (Ozone Depletion Potential)
GWP = 5 (Global Warming Potential)
polyurethane keeps energy costs low.



Magnetic removable gasket without tools



Internal bottom made in S/S with stamped rounded corners to facilitate the cleaning procedures.



Embossed guides



Shelf



Digital controller

*Specification may change without prior notice

Model	Capacity Lt / ft³	Ambient temp. °C/°F	Cabinet / Packing Dimensions			Voltage	Amps	Shipping Weight
PSB7	700 / 23	40° / 104°	mm / inches			230/50/1	2,5	120kg/265Lbs
Temp. °C / °F	Cooling Power W	Absorbed Power W	L	D	H	Plug	Shelves	Gas
-10° , -25° C 14° , -13° F	560	400	68,3 (cm) 26 7/8"	80 (cm) 31 1/2"	209(cm) 82 9/32"	Schuko 16A	3	R290
			74 (cm) 29 9/64"	85 (cm) 33 1/2"	225(cm) 88 19/32"			

Construction specifications:

DESIGN

Desmon reach-in are manufactured in Italy with enduring ergonomic features to protect your long term investment. Designed using the highest technologies, quality materials and components to provide the user with colder product temperatures, lower utility costs, exceptional food safety and the best value in today's food service marketplace.

CABINET CONSTRUCTION

All made in stainless steel AISI 441, unique in the market place. The finest stainless available; latest generation, higher tensile strength for fewer dents and scratches. .
 Higher insulation rates thanks to high-tech environmentally friendly CFC free, Cyclopentane foaming keeping insulation properties longer than other foams. 5% of energy consumption savings guarantee if compared to other CFC free foams.
 Interior - attractive stainless steel Aisi441, "rounded corners".

REFRIGERATION SYSTEM

Factory engineered, monobloc refrigeration system using environmentally friendly (HCFC free) R290 (Propane).
 Evaporator coil & condenser balanced for low power consumption - holding the widest temperature range in its class: Temperature Range, getting the best in food preservation:
 Coolers adjustable from (-10°C to -25°C / 14 to -13°F).
 Sealed, cast iron, self-lubricating evaporator fan motor(s) and larger fan blades with a more efficient low velocity, high volume airflow design. Ensuring faster temperature recovery and shorter run times in the busiest of food service environments.

DOORS

Stainless steel exterior and interior.
 Guaranteed door handle.
 Magnet seal
 Gasket of one piece construction, removable without tools for ease of cleaning.

SHELVING

Nr. 3 heavy duty PVC coated wire shelves GN2/1 530x650 (20 55/64"x25 19/32") included per each door


MODEL FEATURES

1 digital display adjustable with alarms.
 Evaporator is epoxy coated to eliminate the potential of corrosion.
 "Rounded Corners" compliant for food product.

ELECTRICAL

Unit completely pre-wired at factory and ready for final connection to a dedicated outlet.
 Cord and plug set included
 Voltages:
 230V/50Hz/1 phase

Architect Corner

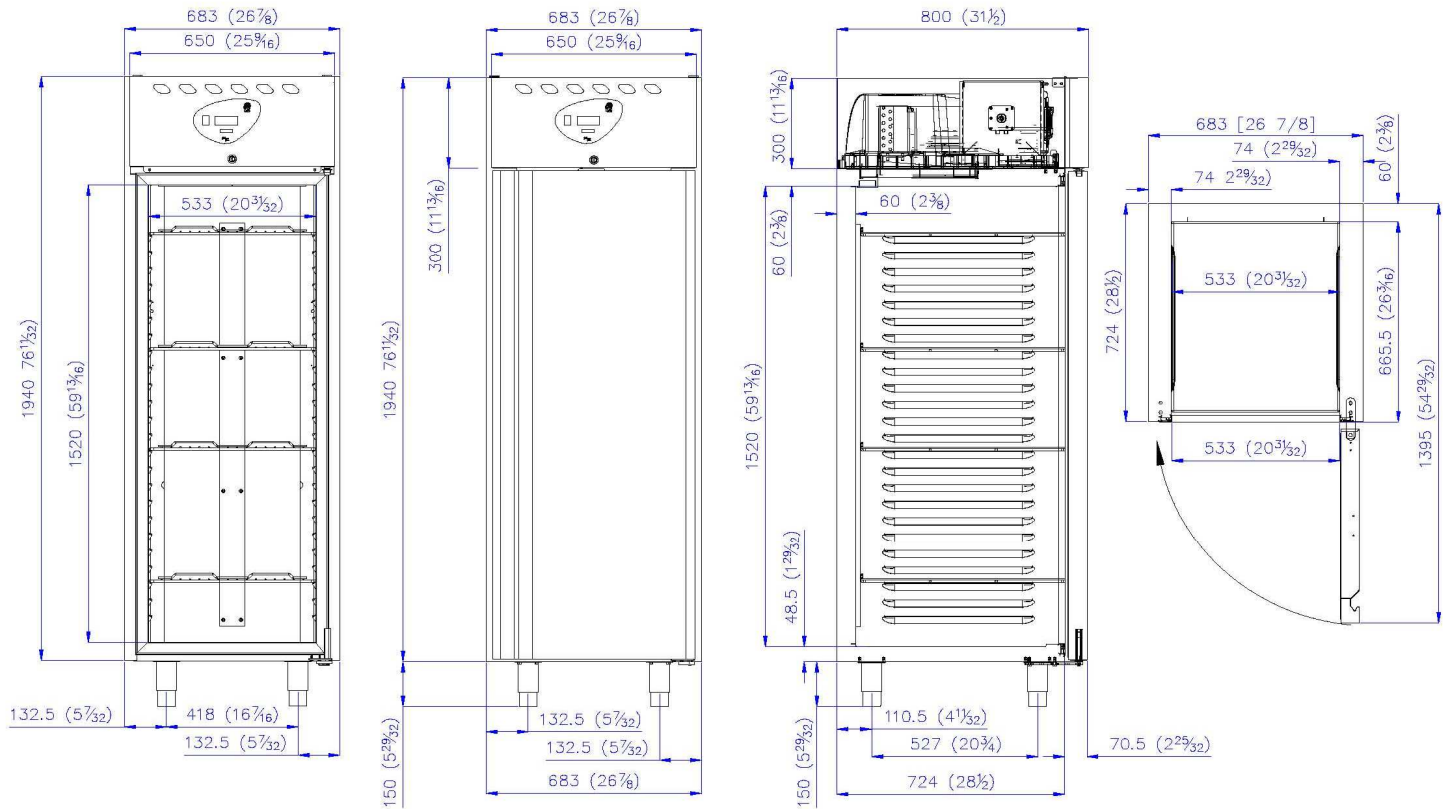

Project Name:	_____
Location:	_____
Item:	_____ Quantity: _____
Date:	_____

Options:

The following options are available for this model. The model name will be modified with adding some extensions indicating the installed options:



Internal light: Name extension "L" (ex. PSB7L)



Swivel (lockable) castors : Name extension "CS" (ex. PSB7CS) *



Door lock: Name extension "SR" (ex. PSB7SR)



Adjustable stainless steel legs: Name extension "PI" (ex. PSB7PI)



S/S flanged legs: Name extension "PF" (ex. PSB7PF)

- **Door left hinged** (right is standard): Name extension "LH" (ex. PSB7LH)
- **Product available with voltage 220V/60Hz/1phase:** Name extension "-O" (ex. PSB7-O)

*NOTE: the height of the castor is 155mm.