

Project Name:	 _	
Location:	 _	
Item:	 Quantity:	
Date:		

Model: **PTGB2**

Counter:

2 full doors (Monobloc refrigaration system) (Propane refrigerant R290)







gasket without tools

Digital controller



Internal bottom made in S/S with stamped rounded corners to facilitate the cleaning procedures.



Shelf





Epoca Cloud assistence

*Specification may change without prior notice

Model	Capacity Lt / ft³	Ambient temp. °C/°F	Cabinet	/ Packing Dim	ensions	Voltage	Amps	Shipping Weight
PTGB2	280 / 9,9	40° / 104°		mm / inches		230/50/1	2,5	130kg/287Lbs
Temp. °C / °F	Cooling power W	Absorbed Power W	L	D	Н	Plug	Shelves	Gas
-10°,-25° C 14°,-13° F	560	450	146 (cm) 57 31/64"	70 (cm) 27 1/2"	89(cm) 35 1/32"	Schuko 16A	2	R290
			150 (cm) 59"	74 (cm) 29 5/32"	100(cm) 39 3/8"			

Standard Features:

• GOLD LINE

Is designed with enduring quality that will improve the efficiency and production of your restaurant. Constructed with stainless steel AISI 304 interior & exterior.

• ERONTDANEI

Embassed frontpanel hinged to facilitate the routine maintenance

• INTERIOR and EXTERIOR

Durable, AISI 304 stainless steel.

• REFRIGERANT GAS

Environmentally friendly R290 (Propane)

LEGs

Adjustable stainless steel legs

• POWER CORD

Cord and plug included

• SHELVING

Nr. 1 epoxy coated wire shelf standard, installed per full door section.

• TEMPERATURE CONTROLLER

Electronic digital controller

• INSULATION

Ciclopenthane High density foamed in place environmentally friendly.

Kyoto Protocol Compliant:

ODP = 0 (Ozone Depletion Potential)

GWP = 0 (Global Warming Potential)

polyurethane keeps energy costs low.

•Wi-Fi CONNETIVITY

Wi-Fi connectivity for the integration with the EPOCA cloud platform for remote





Project Name: Location:	 -	
Item: Date:	 Quantity:	

Construction specifications:

DESIGN

Desmon counter are manufactured in Italy with enduring ergonomic features to protect your long term investment. Designed using the highest technologies, quality materials and components to provide the user with colder product temperatures, lower utility costs, exceptional food safety and the best value in today's food service marketplace.

CABINET CONSTRUCTION

All made in stainless steel AISI 304, unique in the market place. The finest stainless available; latest generation, higher tensile strength for fewer dents and scratches.

Higher insulation rates thanks to high-tech environmentally friendly CFC free, Cyclopentane foaming keeping insulation properties longer than other foams. 5% of energy consumtion savings guarantee if compared to other CFC free foams. Interior - attractive stainless steel Aisi304, "rounded corners".

REFRIGERATION SYSTEM

Factory engineered, monobloc system using environmentally friendly (HCFC free) R290 refrigerant(Propane).

Evaporator coil & condenser balanced for low power consumption - holding the widest temperature range in its class: Temperature Range, getting the best in food preservation:

Coolers adjustable from (-10 to -25°C / 14 to -13°F). Sealed, cast iron, self-lubrificating evaporator fan motor(s) and larger fan blades with a more efficient low velocity, high volume airflow design. Ensuring faster temperature recovery and shorter run times in the busiest of food service environments.

DOORS

Stainless steel exterior and interior.
Guaranteed door handle.
Magnet Seal
Gasket of one piece construction, removable

without tools for ease of cleaning.

SHELVING

Nr. 1 heavy duty PVC coated wire included per each door


MODEL FEATURES


1 digital display adjustable with alarms Evaporator is epoxy coated to eliminate the potential of corrosion. "Rounded Corners" compliant for food product.

FLECTRICAL

Unit completely pre-wired at factory and ready for final connection to a dedicated outlet. Cord and plug set included Voltages: 230V/50Hz/1 phase

Architect Corner

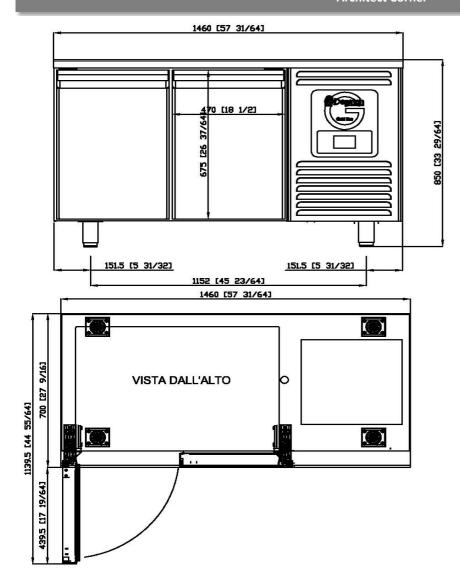

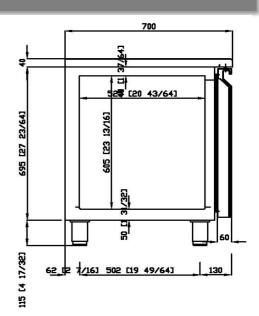





Project Name	:	-	
Location:			
Item:		Quantity:	
Date:			

Options:

The following options are available for this model. The model name will be modified with adding some extentions indicating the installed options:



Swivel (lockable) castors: Name extention "CS" (ex. PTGB2CS) *



S/S flanged legs: Name extention "PF" (ex. PTGB2PF)



1/2 drawer set: Name extention "K" (ex. PTGB2-K)

1/3 drawer set: Name extention "J" (ex. PTGB2-J)



Splashback: Name extention "A" (ex. PTGB2A)

- **Product available with voltage 220V/60Hz/1phase:** Name extention "-O" (ex. PTGB2-O)

*NOTE: the height of the castor is 155mm.

