

Project Name:	
Location:	
Item:	
Date:	

Quantity:

Model: TSM2R

Counter:

2 full doors - for remote cooling





Magnetic removable gasket without tools

*Specification may change without prior notice



Internal bottom made in S/S with stamped rounded corners to facilitate the cleaning procdures.



Digital controller



Model	Capacity Lt / ft3	Ambient temp. °C/°F	Cabinet / Packing Dimensions			Voltage	Amps	Shipping Weight
TSM2R	275 / 9,71	40° / 104°	mm / inches			230/50/1	-	90kg/199Lbs
Temp. °C / °F	Cooling Power W	Absorbed Power W	L	D	н	Plug	Shelves	Gas
-2°,8° C 28°,46° F	350	-	105 (cm) 41 21/64"	70 (cm) 27 9/16"	86,5 (cm) 34 3/64"	Schuko	2	R452A
			110 (cm) 43 19/64"	74 (cm) 29 9/64"	100(cm) 39 3/8"			

GWP = 5 (Global Warming Potential) polyurethane keeps energy costs low.



Standard Features:

• SILVER LINE

Is designed with enduring quality that will improve the efficiency and production of your restaurant. Constructed with stainless steel interior & exterior.

• INTERIOR and EXTERIOR Durable, stainless steel.

• REFRIGERANT GAS

R452A.

• LEGS Adjustable plastic legs

 POWER CORD Cord and plug supplied

 SHELVING Nr. 1 epoxy coated wire shelf standard, installed per full door section.

• TEMPERATURE CONTROLLER Electronic digital controller

• INSULATION

Ciclopentane High density foamed in place environmentally friendly. Kyoto Protocol Compliant: ODP = 0 (Ozone Depletion Potential)



Project Name: _____ Location: _____ Item:

Date:

Quantity:

Construction specifications:

DESIGN

Desmon counter are manufactured in Italy with enduring ergonomic features to protect your long term investment. Designed using the highest technologies, quality materials and components to provide the user with colder product temperatures, lower utility costs, exceptional food safety and the best value in today's food service marketplace.

CABINET CONSTRUCTION

All made in stainless steel AISI 304/441, unique in the market place. The finest stainless available; latest generation, higher tensile strength for fewer dents and scratches. .

Higher insulation rates thanks to high-tech environmentally friendly CFC free, Cyclopentane foaming keeping insulation

properties longer than other foams. 5% of energy consumtion savings guarantee if compared to other CFC free foams. "rounded corners".

REFRIGERATION SYSTEM Factory engineered, for remote cooling - using environmentally friendly - Thermostatic valve -(HCFC free) R452A refrigerant.

Evaporator coil & condenser balanced for low

power consumption - holding the widest temperature range in its class: Temperature Range, getting the best in food preservation:

Coolers adjustable from (-2°C to 8°C / 28 to 46°F). Sealed, cast iron, self-lubrificating evaporator fan motor(s) and larger fan blades with a more efficient low velocity, high volume airflow design. Ensuring faster temperature recovery and shorter run times in the busiest of food service environments.

DOORS

Stainless steel exterior and interior. Door extends full width of cabinet shell. Guaranteed door handle. Magnet Seal self-closing door. Gasket of one piece construction, removable without tools for ease of cleaning.

SH**ELVING**

Nr. 1 heavy duty PVC coated wire included per each door


MODEL FEATURES

1 digital display adjustable with alarms. Evaporator is epoxy coated to eliminate the potential of corrosion. "Rounded Corners" compliant for food product.

ELECTRICAL

Unit completely pre-wired at factory and ready for final connection to a dedicated outlet. Cord and plug set included Voltages: 230V/50Hz/1

Architect Corner

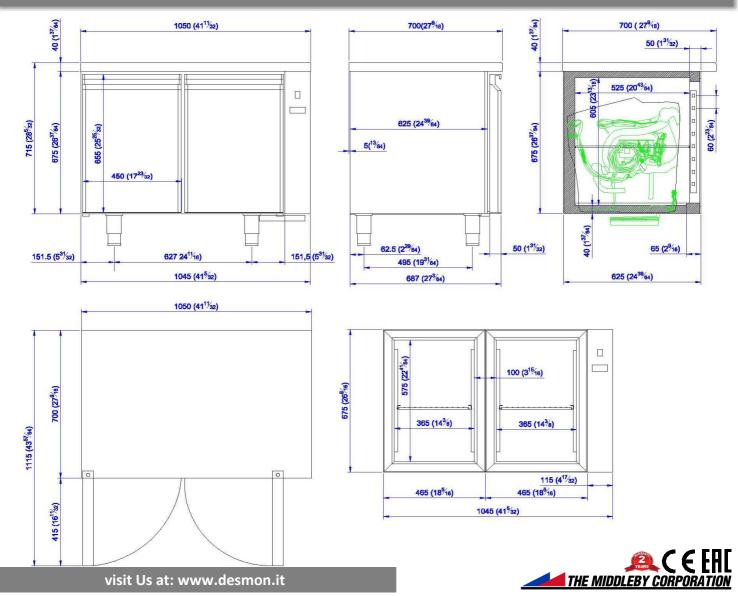



Project Name:		
Location:		
Item:	 Quantity:	
Date:		

Options:

The following options are available for this model. The model name will be modified with adding some extentions indicating the installed options:



Swivel (lockable) castors : Name extention "CS" (ex. TSM2RCS) *



S/S flanged legs: Name extention "PF" (ex. TSM2RPF)



1/2 drawer set: Name extention "Q" (ex. TSM2R-Q)

1/3 drawer set: Name extention "Y" (ex. TSM2R-Y)



Splashback: Name extention "A" (ex. TSM2RA)

*<u>NOTE</u>: the height of the castor is 155mm.

