



### PERFORMANCE

Utilizing TurboChef's patented technology to rapidly cook food without compromising quality, the CIBO+ provides superior cooking performance while requiring less space and consuming less energy.

### VENTILATION

- UL (KNLZ) listed for ventless operation.<sup>†</sup>
- EPA 202 test (8 hr):
  - Product: Pepperoni Pizzas
  - Results: 0.48 mg/m<sup>3</sup>
  - Ventless Requirement: <5.00 mg/m<sup>3</sup>
- Internal catalytic filtration to limit smoke, grease, and odor emissions.

### EXTERIOR CONSTRUCTION

- Stainless steel exterior
- Powder coated, corrosion resistant air filter
- Ergonomic powder coated aluminum handle
- 5" capacitive touch screen with tempered glass cover (7" for international)

### INTERIOR CONSTRUCTION


- 304/430 grade stainless steel interior
- Neoceram heated glass base
- Removable rear grease cover
- Fully insulated cavity

### FEATURES

- CIBO+ utilizes a unique tri-heat technology of microwave, convection air, and an independently controlled base, combined to deliver unrivaled quality, speed, and consistency
- 80 item menu capacity
- Compact footprint (15.5")
- No installation required - plug in and cook
- Ventless operation powered by a UL (KNLZ) listed catalytic converter system
- Easily customize the position of menu items or recipe settings
- Vent catalyst to further limit emissions and odors
- Includes plug and cord (6 ft. nominal)
- Warranty includes 1-year parts and labor

### STANDARD INCLUDED ACCESSORIES

- Oven Cleaner Kit, PN: 105702 (Qty 1)
- Aluminum Paddle, PN: LT05 (Qty 1)
- Teflon Tray, PN: CIBO/TT (Qty 1)
- Teflon Sheet, PN: TFS05 (Qty 1)
- USB Drive (Qty 1)

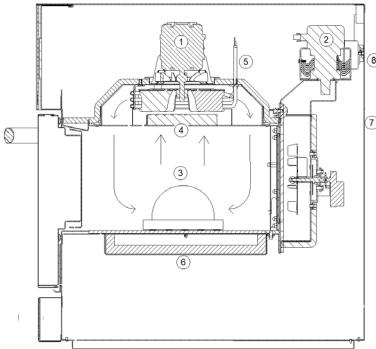

1. Blower Motor	5. Cavity Heater
2. Microwave System	6. Base Heater
3. Stirred Impinged Air	7. Oven Vent Tube
4. Catalytic Converter	8. Air Outlet

FOR SERVICE CALL 833-925-5819

IP23

UK  
CA

CE



ETL  
INTERTEK

Intertek

This product conforms to the ventilation recommendations set forth by NFPA96 using EPA202 test method.

\* Smart Voltage Sensor Technology does not compensate for lack of or over voltage situations. It is the responsibility of the owner to supply voltage to the unit according to the specifications on the back of this sheet.


<sup>†</sup> Ventless certification is for all food items except for foods classified as "fatty raw proteins." Such foods include raw bone-in, skin-on chicken, raw hamburger meat, raw bacon, raw sausage, raw steaks, etc. If cooking these types of foods, consult local HVAC codes and authorities to ensure compliance with ventilation requirements.

Ultimate ventless allowance is dependent upon AHJ approval, as some jurisdictions may not recognize the UL certification or application. If you have questions regarding ventless certifications or local codes, please call 1-800-908-8726.

TurboChef reserves the right to make substitutions of components or change specifications without prior notice.

DIMENSIONS		
Height	25.2"	640 mm
Width	15.5"	394 mm
Depth	26.18"	665 mm
Weight	115 lb.	52 kg
<b>Cook Chamber Dimensions</b>		
Height	7.68"	195 mm
Width	13.39"	340 mm
Depth	13.39"	340 mm
Volume	0.8 cu.ft.	22.55 liters
<b>Wall Clearance (Oven not intended for built-in installation)</b>		
Top	5"	127 mm
Sides	2"	51 mm
Back	2"	51 mm

ELECTRICAL SPECIFICATIONS – BOOSTED			
UK/EU (Single Phase)	N/A	230V, 50Hz, 20A Max Input: 4.6kW MW: 2.0kW Heaters & Blowers: 2.6kW	Plug: 32A 2P+E 230V
UK/EU (Three Phase)	N/A	400V, 50Hz, L1: 8A, L2: 7A, L3: 5A Max Input: 4.6kW, L1: 1800W, L2: 1500W, L3: 1300W MW: 2kW Heaters & Blowers: 2.6kW	Plug: 16A 3P+N+E 415V

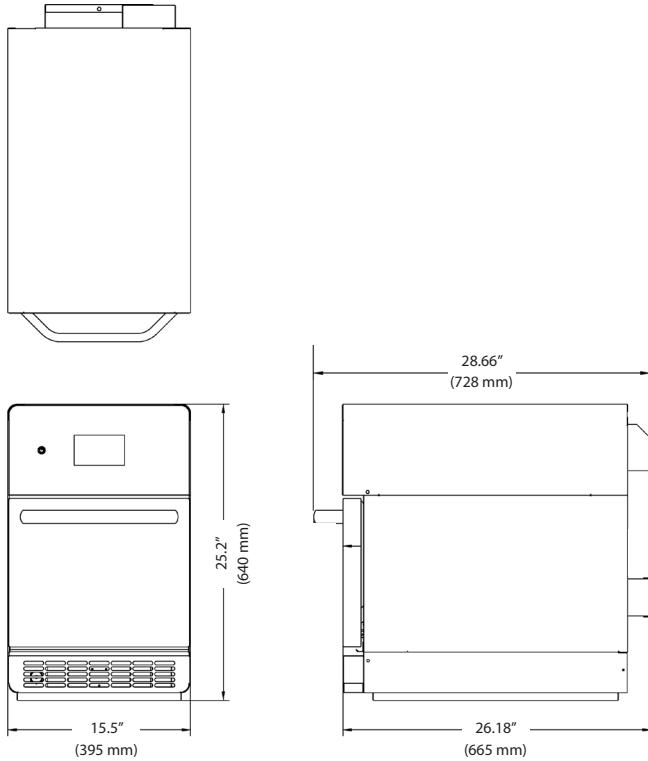

\*Under normal operation, the oven will not exceed the max input value.

 TurboChef recommends installing a type D circuit breaker for European installations.

 **IMPORTANT:** If the oven is placed near a grill or stove, a divider must exist between the oven and the open heat source, with a minimum of 6" (153 mm) between the oven and the divider. If the oven is placed near a fryer, a divider must exist between the oven and fryer, with a minimum of 12" (305 mm) between the oven and the divider.

**FOR SERVICE CALL 833-925-5819**

ELECTRICAL SPECIFICATIONS – SINGLE PHASE		
United States/Canada	CBO-9500-1	208-240V, 60 Hz, 20A, Max Input: 4.0kW MW: 2.0kW Heaters & Blowers: 3.6kW
		 NEMA 6-20
UK	CBO-9500-2-UK	230V, 50 Hz, 13A Max Input: 3.0kW MW: 2.0kW Heaters & Blowers: 2.6kW
		 BS1363
EU	CBO-9500-3-EU	230V, 50 Hz, 13A, 3 Kw Max Input: 3.0kW MW: 2.0kW Heaters & Blowers: 2.6kW
		 CEE7/V11
Mexico	N/A	220V, 60Hz, 12.4A Max Input: 2.73kW MW: 1.8kW Heaters & Blowers: 2.51kW
		 NEMA 6-20
Brazil	CBO-9500-5-BK	220V, 60Hz, 12.4A Max Input: 2.73kW MW: 1.8kW Heaters & Blowers: 2.51kW
		 CEE7/V11
Australia	CBO-9500-6-AK	230V, 50Hz, 13A Max Input: 3.0kW MW: 2.0kW Heaters & Blowers: 2.6kW
		 AS/NZS 3112 (LP-23A) plug
India	CBO-9500-7-IK	230V, 50Hz, 13A Max Input: 3.0kW MW: 2.0kW Heaters & Blowers: 2.6kW
		 Indian (1293) plug
S. Korea	N/A	220V, 60Hz, 12.4A Max Input: 2.73kW MW: 1.8kW Heaters & Blowers: 2.51kW
		 CEE7/V11
Middle East	CBO-9500-9-SK	230V, 60Hz, 13A Max Input: 3.0kW MW: 2.0kW Heaters & Blowers: 2.6kW
		 BS1363



#### SHIPPING INFORMATION

U.S.: All ovens shipped within the U.S. are packaged in a double-wall corrugated box banded to a wooden skid.

International: All ovens shipped by air or less than container load are packaged in wooden crates. Crates are charged at an additional cost.

International LCL: Crates are optional (recommended) at additional cost.

**Box Size:** 23" x 34" x 36" (584 mm x 864 mm x 914 mm)

**Item Class:** 175

**Approximate Boxed Weight:** 160 lb. (73 kg)

**Minimum Entry Clearance Required for Box:** 36" (914 mm)

**FOR SERVICE CALL 833-925-5819**